






C-Tile 15

Powered by the Chromebox Mini


A 15" 2-in-1 solution, based on the Chromebox Mini, which functions as an all-in-one touch solution. The Chromebox Mini is integrated inside the device. This solution easily runs Full HD content and is capable of running different applications based on Chrome OS. The 15 inch touch screen ensures an interactive experience that works within different environments.



- Rockchip RK3288C Quad Core Cortex-A17 1.8GHz
- 15,6", 1920 x 1080 px, 250 nits, VA panel
- Fanless and solid-state
- Two-in-one solution



C-Tile 15

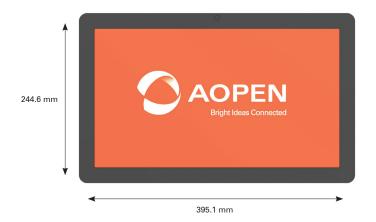



Model name		C-Tile 15
Feature		15" 2-in-1 solution, powered by the Chromebox Mini
Housing Material		Metal
Dimension	W x H x D (mm)	395.1 x 244.6 x 38 mm
	W x H x D (inch)	15.56 x 9.63 x 1.50 inch
Weight		3.3kg / 7.28 lbs
СРИ		Rockchip RK3288C Quad Core Cortex-A17 1.8 GHz
Memory		Dual Channel, LPDDR3 1066,MHz, 4GB (on board)
Graphics	Chip	ARM Mali-T764
Panel	Resolution	15,6", 1920 x 1080
	Maximum Brightness	250 nits
	Panel Type	VA
	Viewing angle	160/160
	Response time	25ms
	Touch	Multi Touch PCT
Expansion slot		-
Audio	Type	Maxim MX98090
	Channel	Stereo
LAN		Gigabit 10/100/1000
Storage		EMMC 16G SSD (on board)
Security		Kensington Lock Hole x1

System I/O	DC Jack		x 1	
	HDMI Port		-	
	USB 2.0 Port		x 4	
	RJ45 LAN Jack		x 1	
	COM PORT		x 2 RJ50	
	Audio Set	Line-Out	-	
		Mic-in	-	
	WiFi Antenn	a port	Embedded + Punch out for external antenna	
Watchdog Timer			-	
IP Grade			IP65	
Adapter			40W/19V	
Input Voltage			AC 100 ~ 240V	
Environment				
МТВБ			50.000 hrs	
Operating Temperature			0 ~ 40°C	
Storage Temperature			-10 ∼ 60°C	
Relative Humidity			90% RH (40°C non-condensing)	





